




SPECIFICATION FOR APPROVAL



CUSTOMER	*	REV NO	1.0
DESCRIPTION	Inductor, 1.1mH, 15.0A, 120.0mΩ DCR	PAGE NO	1 of 4
PART NO	L30762-1P-A	DATE	2013.01.22

1.CONFIGURATIONS & DIMENSIONS:

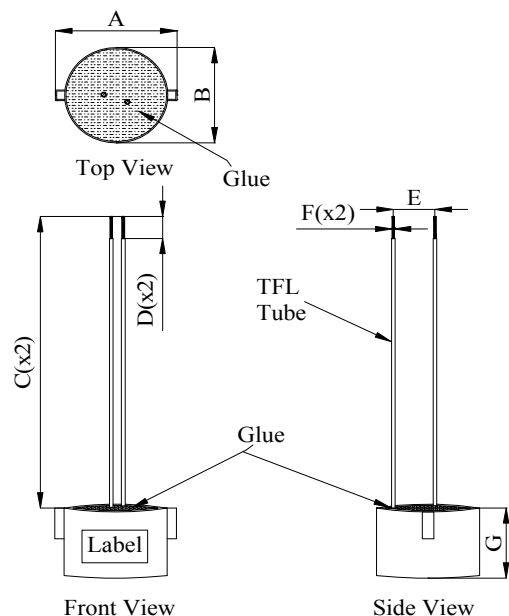

A	60.0	(Max.)	mm
B	49.0	(Max.)	mm
C	270.0	± 10.0	mm
D	15.0	± 2.0	mm
E	8.0	(Ref.)	mm
F	Φ1.4	± 0.1	mm
G	47.0	(Max.)	mm

Note:

1.Label: L30762-1P-A
YY WW

YY:Year;WW:Week.


2.ELECTRICAL CHARACTERISTICS((Ta=25°C):

TEST	CONDITION				
10KHz 0.25V	L	1.10	mH	±	15%
Ta=25°C	DCR	120.0	mΩ		(Max.)
10KHz 0.25V Isat1=8.0A	L@Isat1	0.87	mH		(Typical)
10KHz 0.25V Isat2=10.0A	L@Isat2	0.78	mH		(Typical)
10KHz 0.25V Irms=15.0A	L@Irms	0.53	mH		(Typical)

Notes:

- Isat1: DC current that will cause inductance to drop approx.20%(Typ.)
- Isat2: DC current that will cause inductance to drop approx.30%(Typ.)
- Irms:DC current will caused an approx. temperature of 40°C rise (Typ.)

3.SCHEMATIC DIAGRAM



Note:

- Wire PEWF/U(155°C) Φ1.40mm*1P ;
- 81TS(Ref) C.W

Operating temperature: -55°C ~+130°C

4.TEST INSTRUMENTS

L:WK3260B.

DCR:TH2512B

L@Isat & L@Irms : WK3260B and WK3265B.

APPROVED BY	CHECKED BY	DRAWN BY
Richard Wen	Royi Luo	Anthony Yan



SPECIFICATION FOR APPROVAL



CUSTOMER	*	REV NO	1.0
DESCRIPTION	Inductor, 1.1mH, 15.0A, 120.0mΩ DCR	PAGE NO	2 of 4
PART NO	L30762-1P-A	DATE	2013.01.22

5. TEST DATA FOR MECHANICAL

TEST ITEM	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm
SPEC	60.0 (Max.)	49.0 (Max.)	270.0 ± 10.0	15.0 ± 2.0	8.0 (Ref.)	Φ1.4 ± 0.1	47.0 (Max.)			
1	58.65	47.56	276.67	15.17	7.74	1.38	45.06			
2	58.71	47.62	271.27	15.18	7.96	1.37	45.16			
3	58.58	47.60	270.87	15.67	8.27	1.37	45.27			
4	58.69	47.65	272.38	15.37	8.36	1.38	45.13			
5										
6										
7										
8										
9										
10										
AVERAGE	58.658	47.608	272.798	15.348	8.083	1.375	45.155			

REMARK:

APPROVED BY Richard Wen	CHECKED BY Royi Luo	DRAWN BY Anthony Yan
-----------------------------------	-------------------------------	--------------------------------



SPECIFICATION FOR APPROVAL



CUSTOMER	*	REV NO	1.0
DESCRIPTION	Inductor,1.1mH,15.0A,120.0mΩ DCR	PAGE NO	3 of 4
PART NO	L30762-1P-A	DATE	2013.01.22

6. TEST DATA FOR ELECTRICAL

TEST ITEM	L mH	DCR mΩ	L@Isat1 mH	L@Isat2 mH	L@Irms mH		
CON.	10KHz 0.25V	Ta=25℃	10KHz 0.25V Isat1=8.0A	10KHz 0.25V Isat2=10.0A	10KHz 0.25V Irms=15.0A		
SPEC	1.10 ± 15%	120.0 (Max.)	0.87 (Typical)	0.78 (Typical)	0.53 (Typical)		
1	1.13	91.06	0.893	0.798	0.604		
2	1.09	91.27	0.861	0.770	0.583		
3	1.10	91.08	0.869	0.777	0.588		
4	1.12	91.36	0.885	0.791	0.599		
5							
6							
7							
8							
9							
10							
AVERAGE	1.1100	91.1925	0.8769	0.7837	0.5937		

REMARK:

APPROVED BY Richard Wen	CHECKED BY Royi Luo	DRAWN BY Anthony Yan
-----------------------------------	-------------------------------	--------------------------------






SPECIFICATION FOR APPROVAL



CUSTOMER	*	REV NO	1.0
DESCRIPTION	Inductor, 1.1mH, 15.0A, 120.0mΩ DCR	PAGE NO	4 of 4
PART NO	L30762-1P-A	DATE	2013.01.22

7.ELECTRIC CHARACTERISTICS.

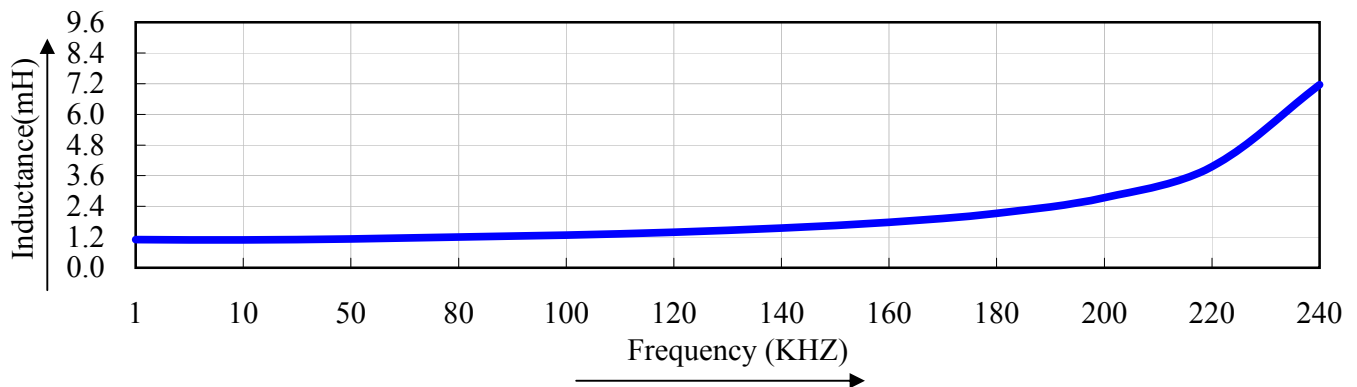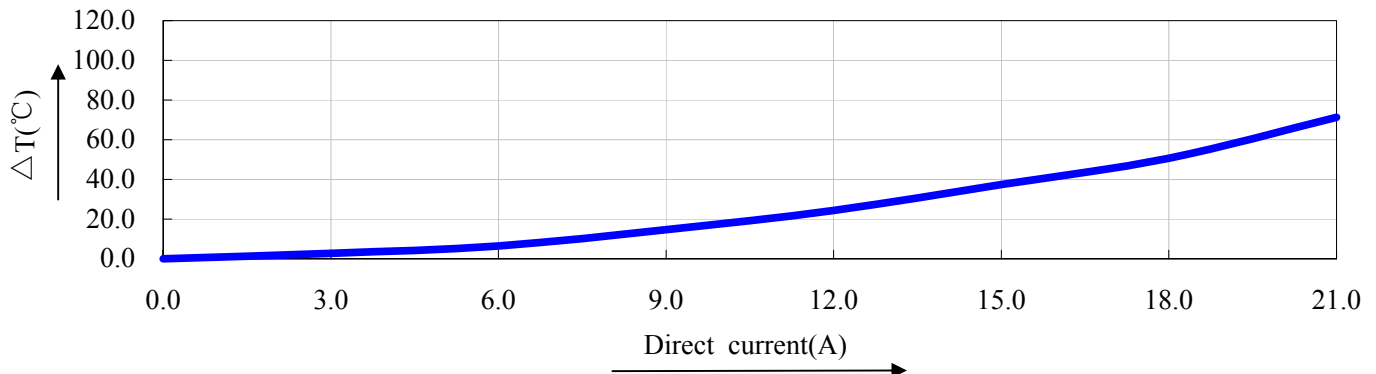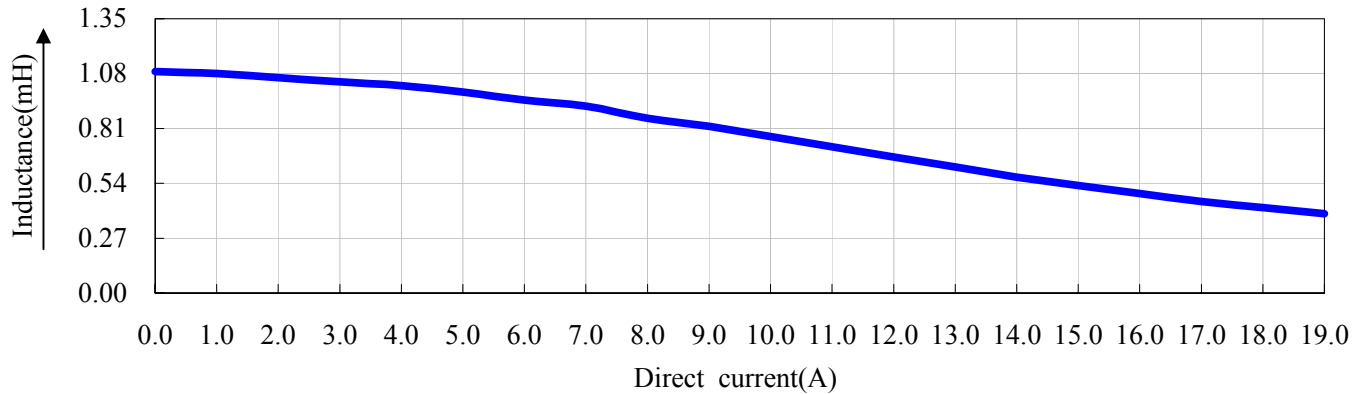

APPROVED BY

Richard Wen

CHECKED BY

Royi Luo

DRAWN BY

Anthony Yan