


SL4328A-R30KHF & -R40KHF



1. Features:

- Ferrite based SMD Inductor with lower core loss.
- Inductance Range:300nH to 400nH,Custom values are welcomed.
- High current output chokes, upto 35.0 Amp with approx. 20% roll off.
- Low Profile 7.20mm Max. height .
- Foot Print 11.00 x 7.20 mm Max.
- Ideal for Buck Converter, VRM & High Density Board Design.
- Operating frequency up to 1 MHz application.
- Operating Temperature Range -55°C to + 130°C , RoHs & HF compliance .
- T & R Qtys: 500 pcs , 13" Reel ;

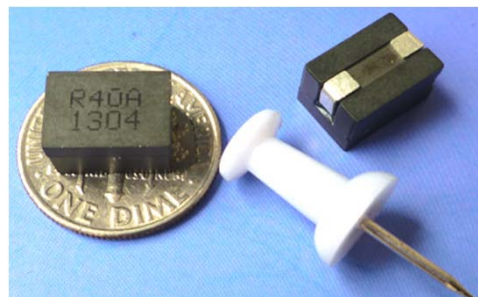


2. Electrical Characteristic of SL4328A-R30KHF&R40KHF:

Part Number	Inductance (uH) ± 10%	DCR (mΩ) ± 6.0%	Isat ¹ (A) @25°C	L@Isat ¹ (nH) Min.	Isat ² (A) @45°C	Isat ³ (A) @100°C	Isat ⁴ (A) @125°C	Irms (A) @25°C
SL4328A-R30KHF	0.30	0.47	35.00	217.00	34.00	29.00	28.00	42.00
SL4328A-R40KHF	0.40	0.47	25.00	288.00	24.00	23.00	20.00	42.00

3. Mechanical Dimension(Unit:mm):

A	B	C	D	E	F	G
Max.	Max.	Max.	Max.	Nom.	Nom.	Nom.
7.20	10.40	7.20	11.00	5.60	2.05	2.50

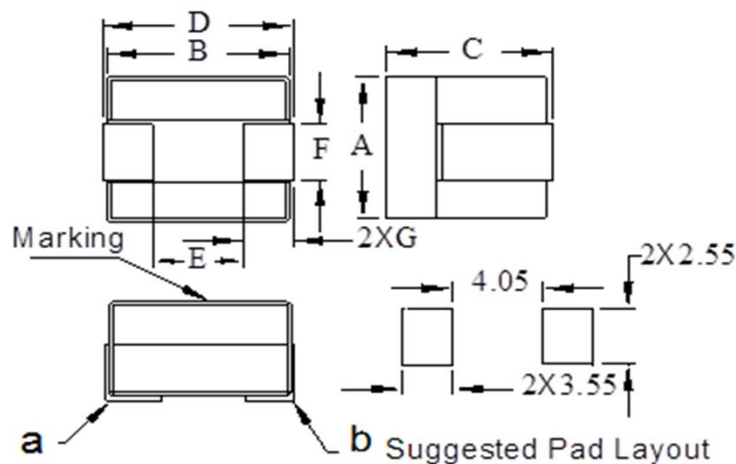

Note:

- 1>.Open Circuit Inductance (OCL) test condition:100KHz,0.1Vrms,0Adc ,at 25 °C.
- 2>.Full Load Inductance (FLL) Test condition:100KHz,0.1Vrms ,Isat ;(Ta=25 °C).
- 3>.Isat¹,Isat²,Isat³ & Isat⁴ : DC current that will cause inductance to drops approximately by 20% ;
- 4>. Irms: DC current for an approximate temperature rise of 40°C without core loss,.Derating is necessary for AC currents. PCB pad layout,trace thickness and width,air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 130°C under worst case operating conditions verified in the end application.
- 5>.The nominal DCR is measured from point "a" to point"b",as shown above on the mechanical drawing.



SL4328A-R30KHF & -R40KHF



4. Inductance vs. Current Characteristics:

