

1. Features of SLQ40409A Series :

- Ferrite based SMD inductor with lower core loss.
- Inductance Range: 0.33uH to 3.30uH, Custom values are welcomed.
- High current output chokes, up to 77.0 Amp with approx. 20% roll off.
- Low Profile 10.00 mm Max. height .
- Foot Print 10.00 x 8.50 mm .
- Perfect for high density designs with limited board space.
- Operating frequency up to 5.0 MHz application.
- Operating Temperature Range -55° C to +130° C , RoHs & HF compliance .
- T & R Qtys: 350 pcs , 13" Reel ;




2. Electrical Characteristic of SLQ40409A Series:

ITG Part Number	OCL ¹ (uH) ± 20%	L @ Isat1 ² (uH) Min.	DCR ³ (mΩ) Typ.	DCR ³ (mΩ) Max.	Isat1 ⁴ (A) @25°C	Isat2 ⁴ (A) @75°C	Isat3 ⁴ (A) @100°C	Irms ⁵ (A) @25°C
SLQ40409A-R33MHF	0.33	0.238	1.05	1.20	77.00	70.00	64.00	27.00
SLQ40409A-R47MHF	0.47	0.338	1.05	1.20	61.00	55.00	51.00	27.00
SLQ40409A-R56MHF	0.56	0.403	1.05	1.20	54.00	46.00	45.00	27.00
SLQ40409A-R68MHF	0.68	0.490	1.05	1.20	40.00	35.00	33.00	27.00
SLQ40409A-1R0MHF	1.00	0.720	1.05	1.20	26.50	23.50	22.50	27.00
SLQ40409A-1R2MHF	1.20	0.864	1.05	1.20	23.00	20.50	19.00	27.00
SLQ40409A-1R5MHF	1.50	1.080	1.05	1.20	17.50	15.50	14.50	27.00
SLQ40409A-2R2MHF	2.20	1.584	1.05	1.20	11.50	10.00	9.50	27.00
SLQ40409A-3R3MHF	3.30	2.376	1.05	1.20	6.50	6.00	5.50	27.00

3. Mechanical Dimension(Unit : mm):

A	B	C	E	F	G
Max.	Max.	Max.	± 0.30	± 0.20	± 0.30
10.00	8.50	10.00	4.80	2.50	2.00




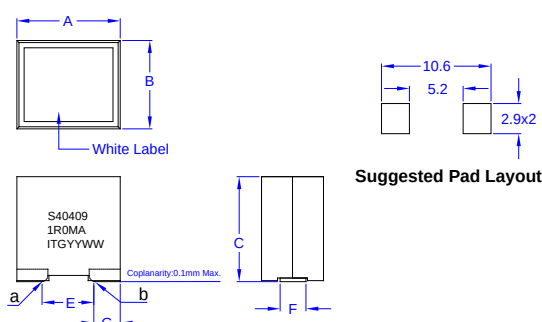


Notes:





1. Open Circuit Inductance (OCL) test condition: 500KHz, 0.25Vrms, 0A_{dc} , at 25 °C.
2. L @ Isat and L @ Irms Test condition: 500KHz, 0.25Vrms (Ta=25 °C).
3. The nominal DCR is measured from point "a" to point "b", as shown above on the mechanical drawing (Ta=25°C).
4. Isat1, Isat2 & Isat3 : DC current that will cause inductance to drop approximately by 20%.
5. Irms : DC current for an approximate temperature rise of 40°C without core loss , Derating is necessary for AC currents.
PCB pad layout , trace thickness and width , air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 130 °C under worst case operating conditions verified in the end application.



4. Inductance Characteristics (Inductance vs. Current):

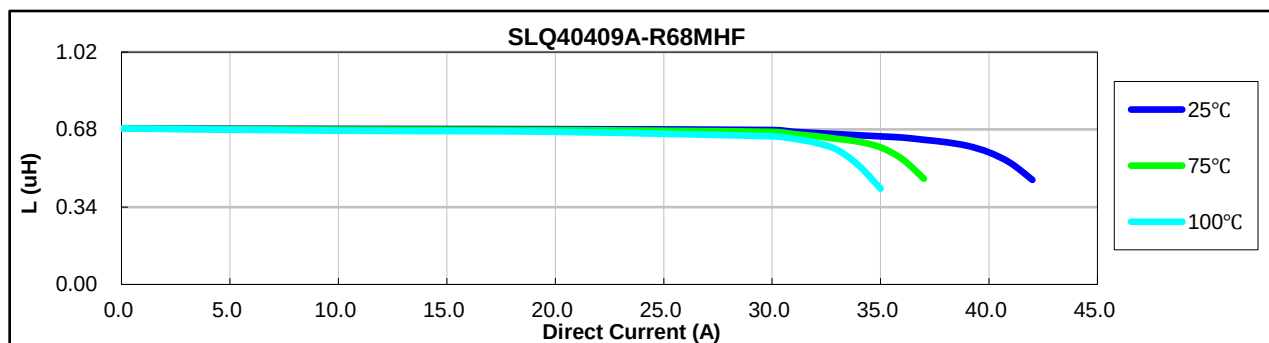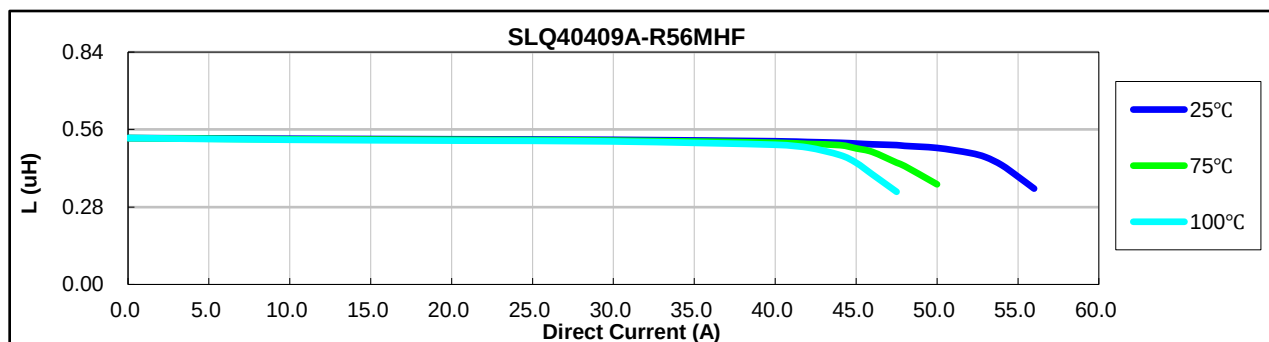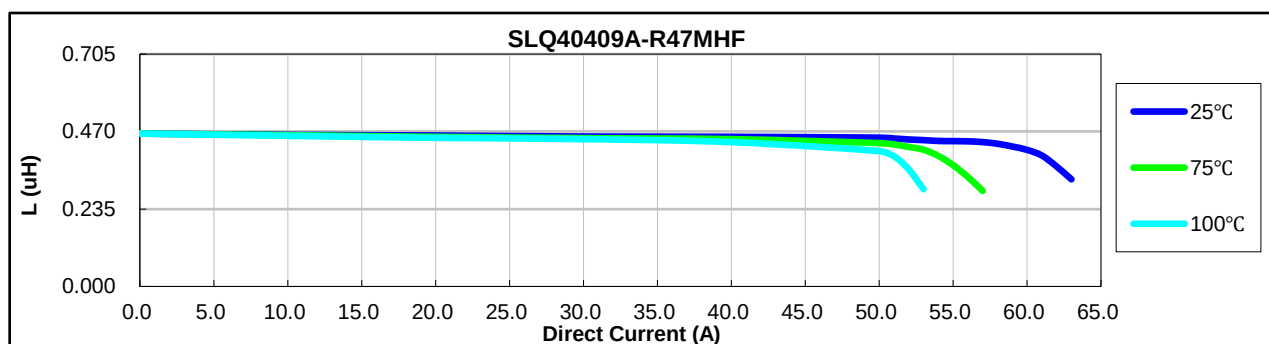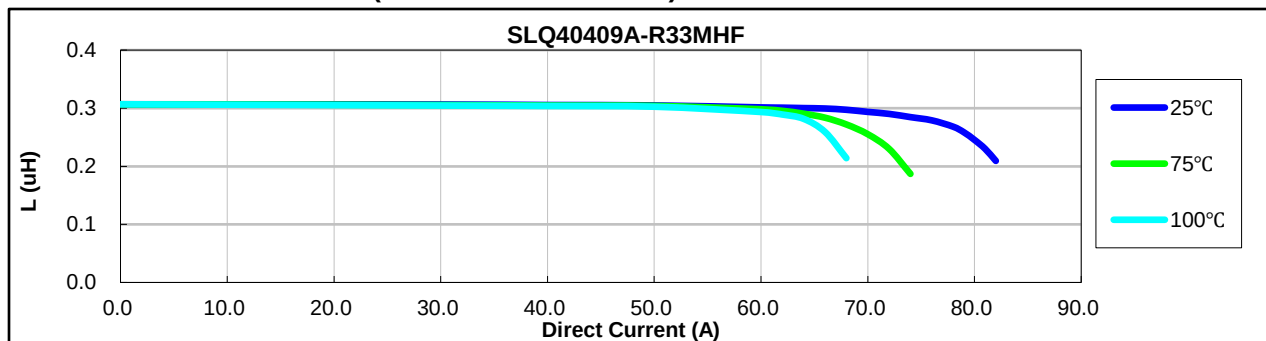

4. Inductance Characteristics (Inductance vs. Current):

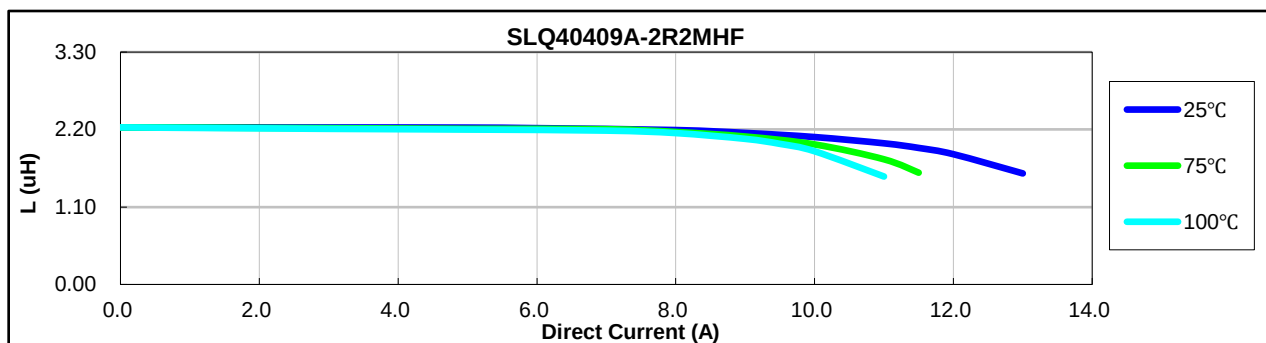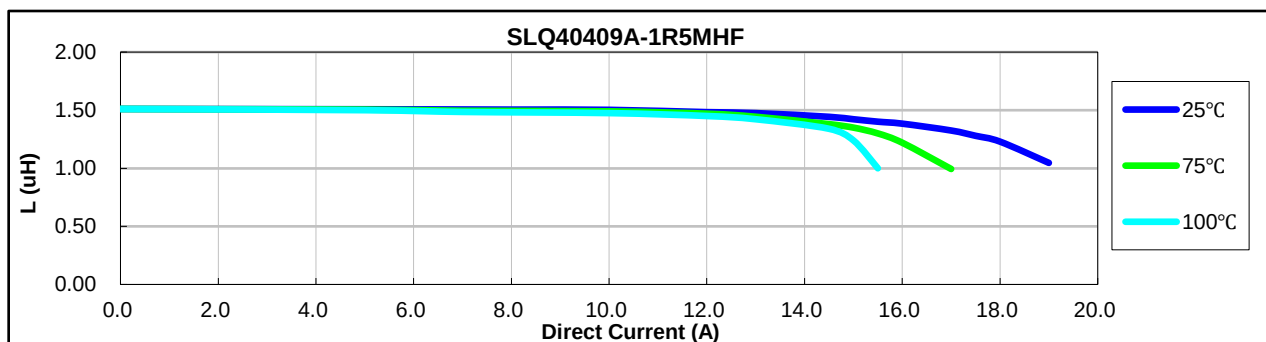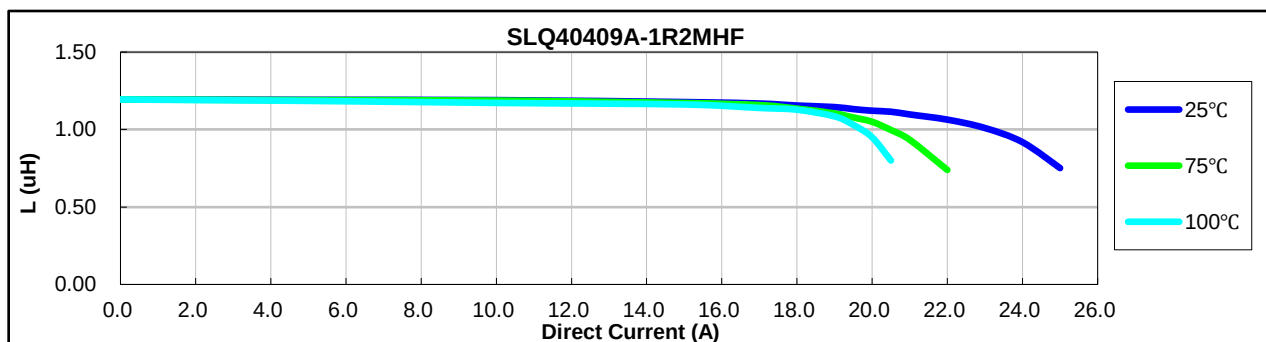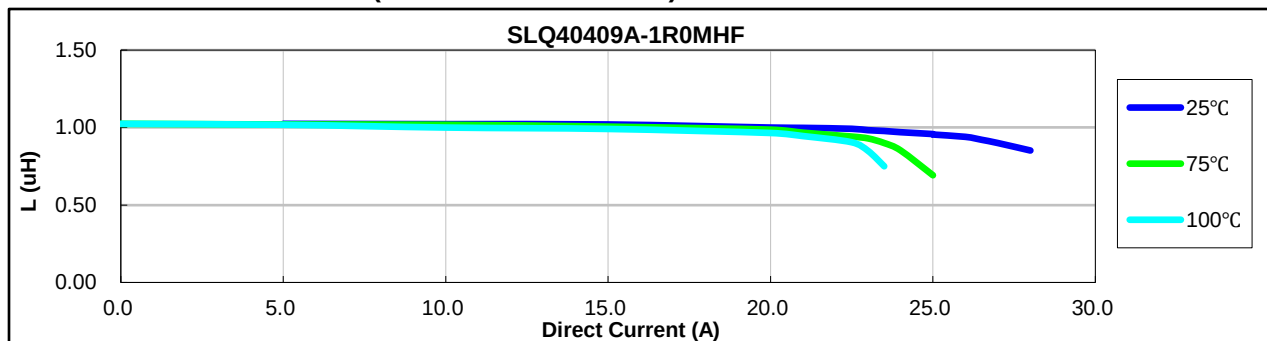

4. Inductance Characteristics (Inductance vs. Current):

