



SMHC2511J Series



1. Features:

- 6.6x7.1mm foot Print, 3.0mm Max. height SMD Power Inductor for high frequency application.
- Inductance range from 0.10uH to 10.00uH.
- High saturation current characteristics by distributed gapped metal dust core.
- Ideal for portable device, Tablets, Notebook, Computers Servers, storage device, workstations, VGA card, Telecommunication Equipment, voltage-regulator modules & High Density DC to DC converter Board.
- Lower DC resistance for higher current application.
- Tight DCR control (5%).
- Tape & Reel Quantity: 1,000 piece per 13 inches reel.
- Operating Temperature Range -55°C to + 125°C.




2. Electrical Characteristics:

ITG Part Number	OCL (uH) ±20%	DCR (mΩ) ±5%	Irms (A)	Isat (A)
SMHC2511J-R10MHF	0.10	1.40	32.50	60.00
SMHC2511J-R15MHF	0.15	1.40	26.00	52.00
SMHC2511J-R20MHF	0.20	2.50	24.00	41.00
SMHC2511J-R22MHF	0.22	2.50	23.00	40.00
SMHC2511J-R33MHF	0.33	3.30	20.00	30.00
SMHC2511J-R47MHF	0.47	3.85	17.50	26.00
SMHC2511J-R68MHF	0.68	5.15	15.50	25.00
SMHC2511J-R82MHF	0.82	7.00	13.00	24.00
SMHC2511J-1R0MHF	1.00	8.44	11.00	22.00
SMHC2511J-1R5MHF	1.50	14.50	9.00	18.00
SMHC2511J-2R2MHF	2.20	16.40	8.00	14.00
SMHC2511J-3R3MHF	3.30	28.50	6.00	13.50
SMHC2511J-4R7MHF	4.70	33.50	5.50	10.00
SMHC2511J-6R8MHF	6.80	56.00	4.50	8.00
SMHC2511J-8R2MHF	8.20	65.00	4.00	7.50
SMHC2511J-100MHF	10.00	97.00	3.00	7.00

3. Mechanical Dimensions (unit: mm):

A ±	B ±	C	D ±	E ±	F	G	H
0.20	0.30	Max	0.30	0.50	Ref	Ref	Ref
6.60	7.10	3.00	3.00	1.60	7.40	3.70	3.50

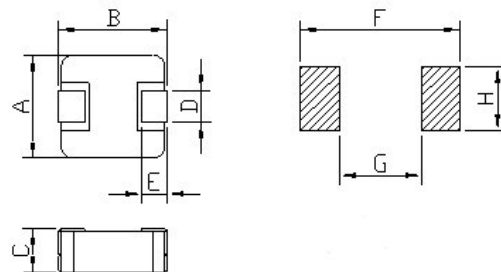

Notes:

1. Open Circuit Inductance (OCL), L@ Irms and L @ Isat are measured at 100KHz, 1.0V (Ta=25°C).
2. Isat: DC current that causes inductance to drop approximately by 30% from OCL.
3. Irms: DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents, PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 125°C under worst case operating conditions verified in the end application.
4. Inductance vs. DC Current vs. Temperature Curve, please see the next pages for more detail information.

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
● Tokyo 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
● sales@inter-technical.com ● www.inter-technical.com Revision B: December 2, 2015









*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



SMHC2511J Series



4. Inductance vs. Current vs. Temperature

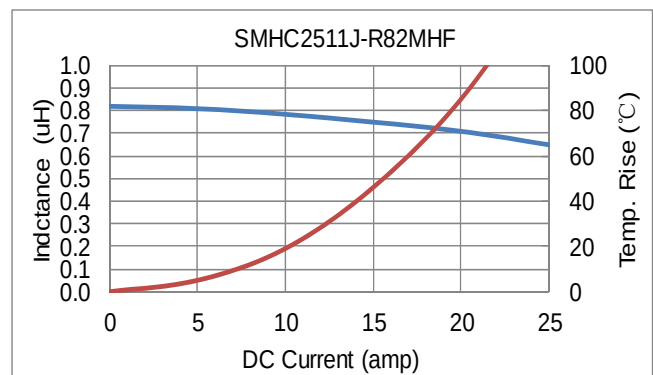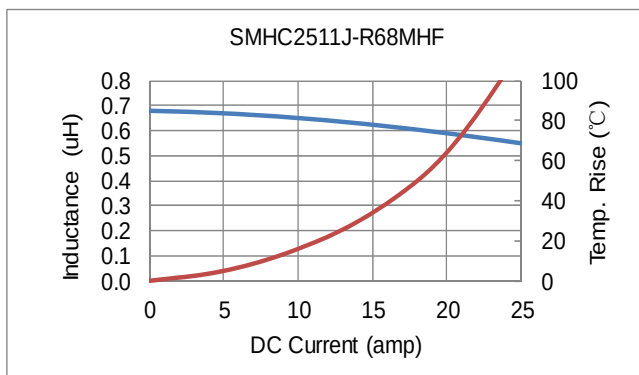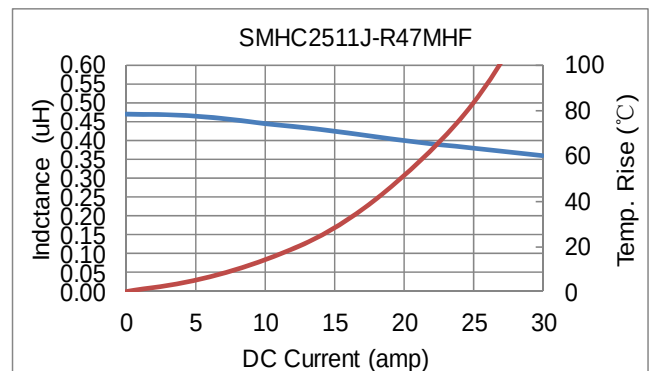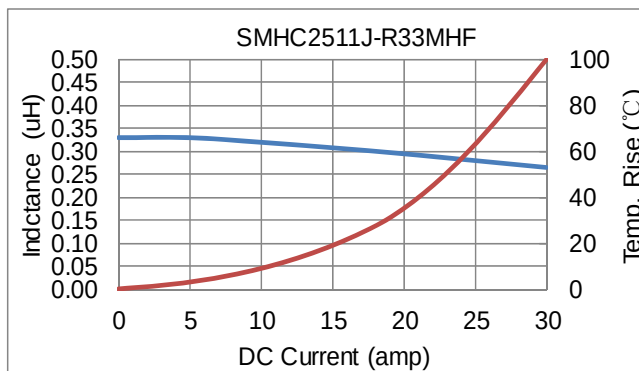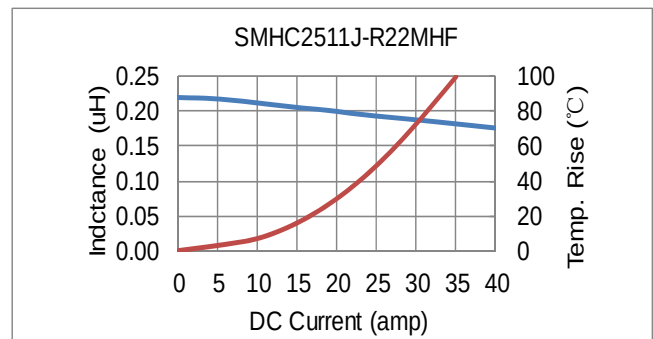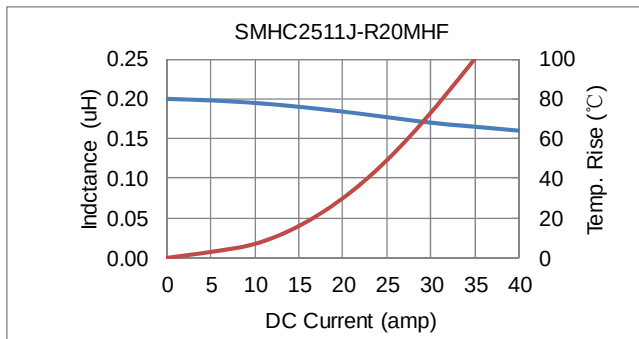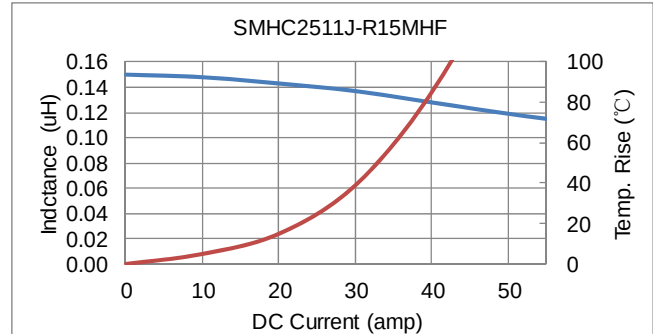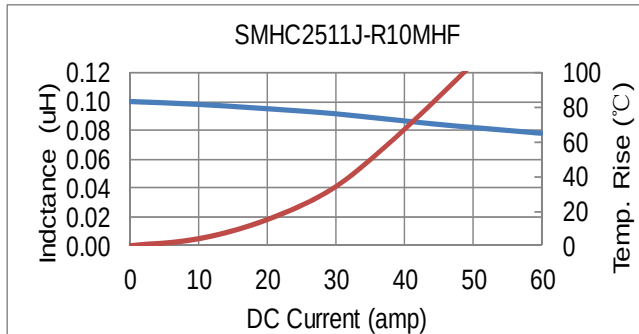

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
 ● Tokyo 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
 ● sales@inter-technical.com ● www.inter-technical.com Revision B: December 2, 2015









*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



SMHC2511J Series



4. Inductance vs. Current vs. Temperature

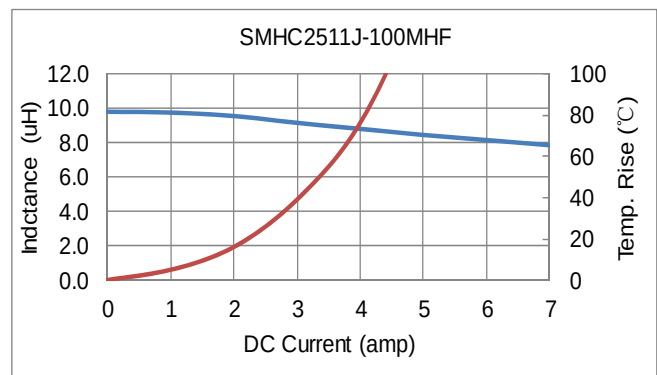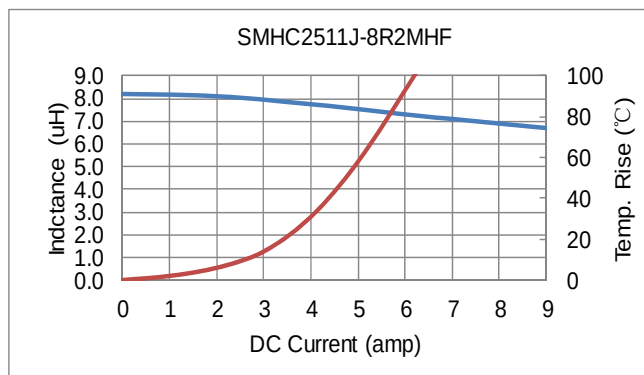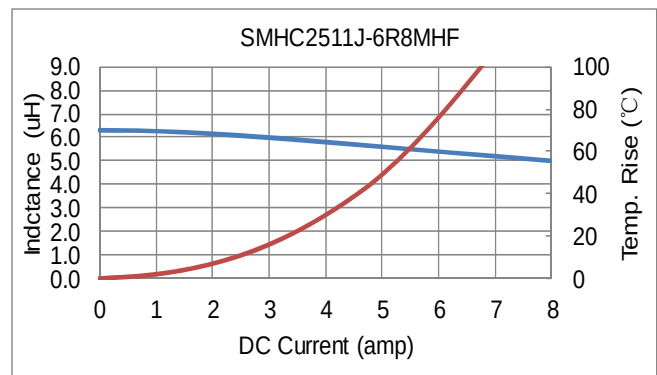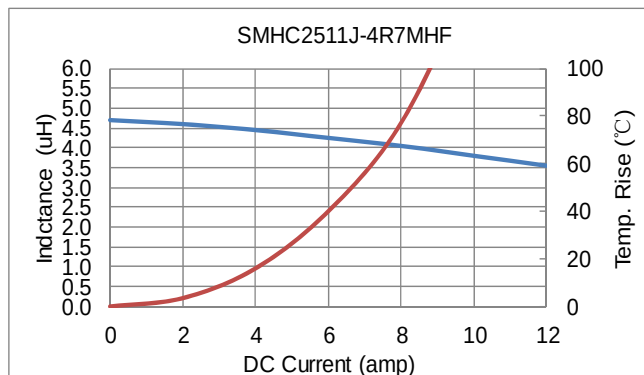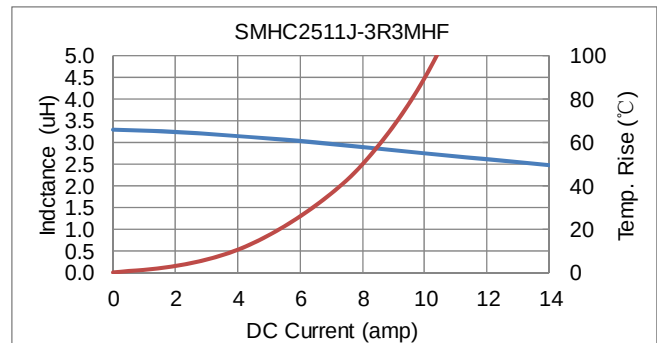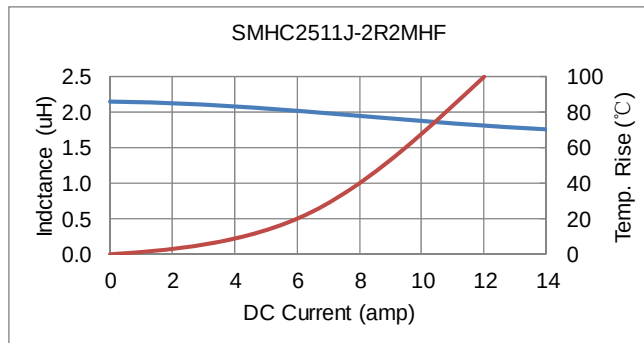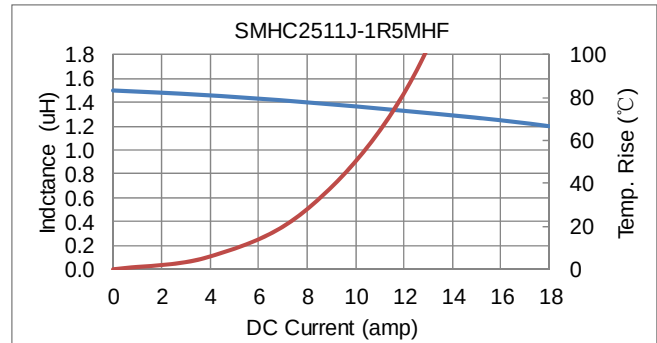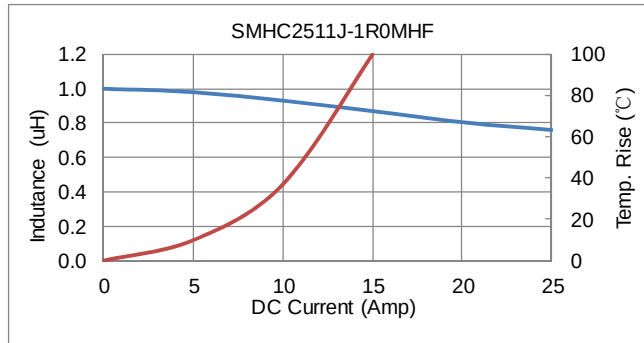

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
 ● Tokyo 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
 ● sales@inter-technical.com ● www.inter-technical.com Revision B: December 2, 2015

*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.